




Single Point Load Cell

YJ Series

The YJ Series is an industrial grade, high performance, bonded foil strain gage load cell. It is designed to accurately measure compression loads for single cell applications in capacity ranges of 0-1 lbs. to 0-100 lbs.

The YJ Series is an industrial-grade, high performance, bonded foil strain gage load cell constructed of nickel-plated alloy tool steel (YJ1) or electro-polished stainless steel (YJ3). The YJ Series is designed to accurately measure compression loads for single cell applications in the capacity range of 0-1 lbs. to 0-100 lbs. The parallelogram design readily tolerates moments induced by angular, eccentric and off-center loading, with minimal sensitivity to these anomalies. This load cell is Harsh Environment Sealed (IP67-Limited Immersion) by virtue of proprietary, multi-redundant barriers uniquely integrated to protect all internal components. Additional protection is provided by stainless steel covers, which also serves to enhance the aesthetics of the YJ Series as a component of an assembly or measurement system. The cable is a durable polyurethane-jacketed cable, with a tinned-copper braided shield for mechanical protection and to minimize the effects of RFI and EMI. The attributes of the YJ Series makes it an ideal choice for very low range force measurements, small hopper and platform weighing, checkweigher scales and O.E.M. weighing situations where an exceptional low capacity, moment compensated, well sealed, and high performance load cell solution is needed. Non-standard or custom configurations can be accommodated consistent with solutions-driven requirements.

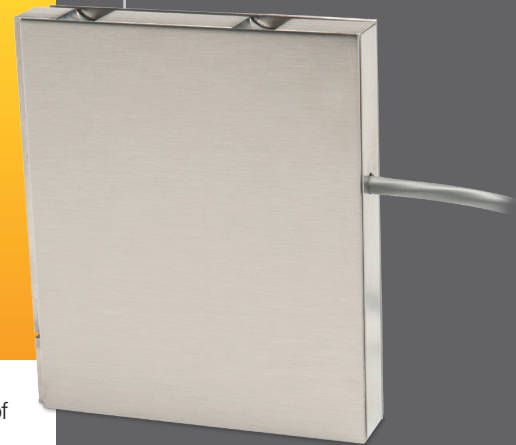

APPLICATIONS

- Low Force Compression Measurements
- Hopper & Netweight Weighing
- Platform and Checkweighing
- High Moment/Off-Center Loading
- OEM and VAR Solutions

FEATURES

- 1 to 100 lbs. Capacities
- Steel or Stainless Steel Element
- Low Profile/Compact Size
- Integral Tension & Compression Overload Protection
- High Temperature Versions
- 0.03% Accuracy Class
- IP67 Environmental Sealing
- Two Year Warranty



For more information call **1-888-545-8988**

SENTRAN, LLC 4355 LOWELL STREET, ONTARIO, CA 91761, U.S.A.
888-545-8988 T: 909-605-1544 FAX: 909-605-6305 www.sentranllc.com

YJ Series Specifications

Innovative Measurement Solutions



PERFORMANCE

Rated Capacities (lbs)	1, 2, 5, 10, 20, 25, 50, 100
Rated Output (FSO)	2 mV/V
Output Tolerance	+25/-10 % R.O
Combined Error Band	≤ 0.03 % FSO
Non-Linearity	≤ 0.03 % FSO
Hysteresis	≤ 0.02 % FSO
Non-Repeatability	≤ 0.01 % FSO
Zero Balance	± 1 % FSO
Creep (30 Minutes)	≤ 0.03 % of load
Zero Return (30 Minutes)	0.01 % of load
Moment Sensitivity	0.010 % FSO/Inch
Maximum Moment	See Dimensions Page
Ultimate Moment	200 % of Maximum Moment

MECHANICAL

Material	Stainless steel
Finish	Natural
Safe overload	Compression 250 % FSO Side Load 30% FSO
Ultimate overload	Compression 300% FSO Side Load: 100% FSO
Deflection	See Dimensions Table
Weight	See Dimensions Table
Mounting Bolt Torque	Torque Table

ELECTRICAL

Input Impedance	400 ± 35 ohms
Output Impedance	352 ± 3 ohms
Insulation Resistance	>5000 Megohms @ 50VDC
Excitation Voltage	10 V AC/DC (15 V maximum)
Cable Color Code	+ Excitation (red) - Excitation (black) + Signal (green) - Signal (white) Shield (natural)
Cable Type	4-conductor, 24 AWG, PVC Jacket, Foil Shield, Diameter: 0.160"
Cable Length	See Dimensions Table
Cable Termination	Finished Conductors
Cable Seal	Epoxy; Conformal

ENVIRONMENTAL

Temperature, Operating	0 to +150 °F (-18 to +66°C)
Temperature, Compensated	14 to +104 °F (-10 to +40°C)
Temperature Effects	Zero < 0.015% FSO/°F < 0.0026% FSO/°C
Temperature Effects	Output < 0.0008% of Rdg./°F < 0.0014% Rdg./°C
Temperature, Storage	-40 to +170 °F (-40 to +77°C)
Sealing	IP67, Multi-redundant; Limited Immersion Tolerance

YJ Typical System Configuration

SENSING LOAD CELL(S)



SIGNAL CONDITIONING

Analog Transmitters



Serial Transmitters



Digital Indication



Process Control



Batch Control




Data Acquisition




OUTPUT OPTIONS

0-5 VDC
0-10VDC
±5 VDC
±10 VDC
4-20 mA
0-20 mA
RS-232
RS-422
RS-485
20 mA Serial Loop
Ethernet
Profibus DP
DeviceNet
CANOpen
ControlNet
Modbus RTU
Wireless

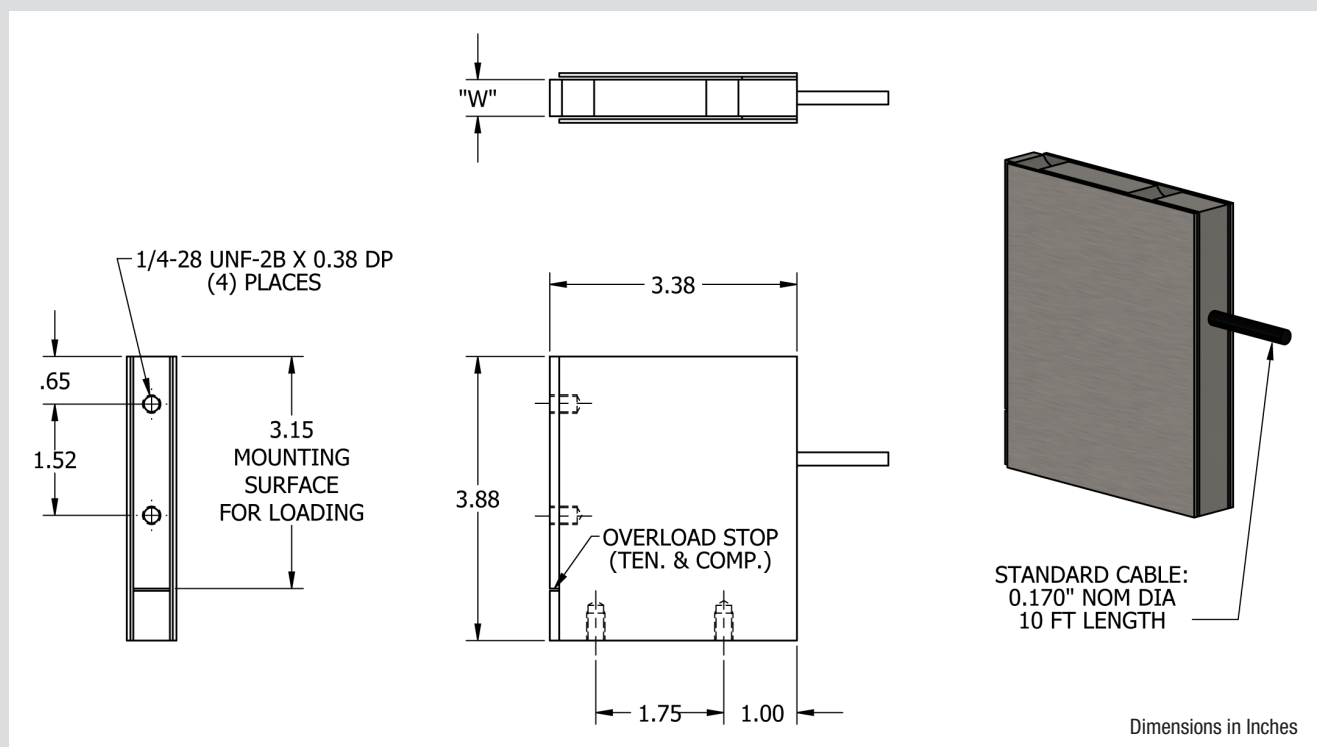


Capacity (LBS)	Maximum Moment (Inches X Capacity)	Deflect	Weight
1	5	0.020"	1.5 LBS
2	5	0.020"	1.5 LBS
5	5	0.020"	1.5 LBS
10	5	0.020"	1.5 LBS
20	5	0.020"	2.0 LBS
25	5	0.020"	2.0 LBS
50	5	0.020"	2.0 LBS
100	5	0.020"	2.8 LBS

YJ Wiring Diagram

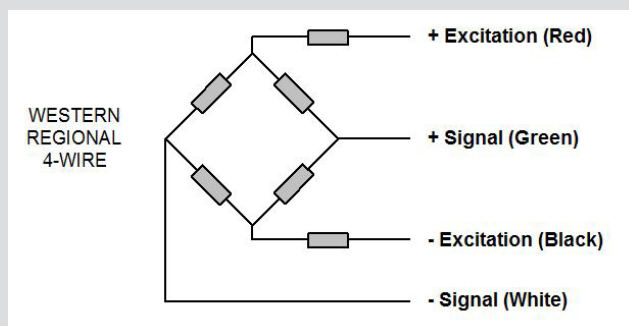




Check Weighing

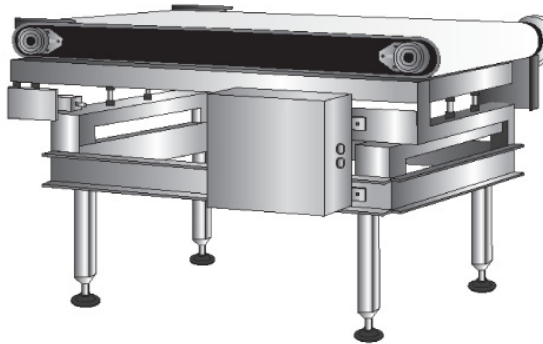


Loss-In-Weight



Net Weighing

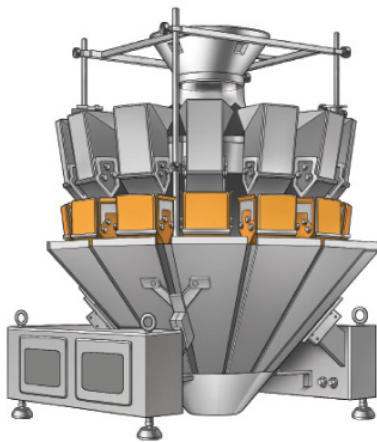


Automated Bottle Filling

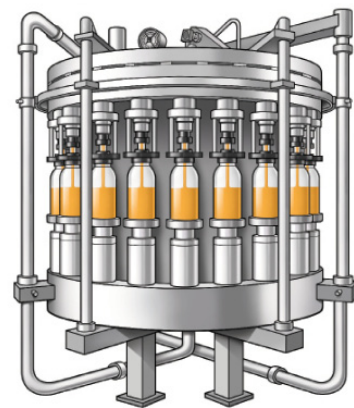

Precious Gas Scale



Solids Flow Control

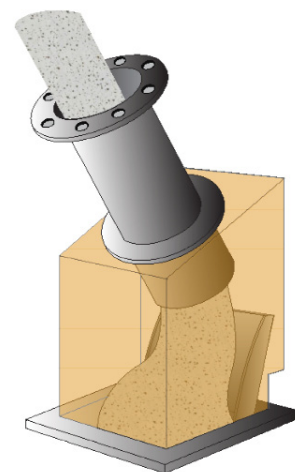

Legal Disclaimer



ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Sentran, LLC, Incorporated, its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Sentran, LLC"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify Sentran, LLC's terms and conditions of purchase, including but not limited to, the warranty expressed therein. Sentran, LLC makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. To the maximum extent permitted by applicable law, Sentran, LLC, disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability. Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Sentran, LLC's knowledge of typical requirements that are often placed on Sentran, LLC products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Sentran, LLC. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Sentran, LLC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Sentran, LLC for any damages arising or resulting from such use or sale. Please contact authorized Sentran, LLC personnel to obtain written terms and conditions regarding products designed for such applications.



SENTRAN, LLC

4355 LOWELL STREET
ONTARIO, CA 91761-2225, U.S.A.
T: 909-605-1544 F: 909-605-6305

www.sentranllc.com

Innovative Measurement Solutions