



SENTRAN

Low Capacity Weigh Module

MQ4 Series

The MQ4 Series is a high performance weigh module constructed of stainless steel. The MQ4 Series is designed to accurately measure compression forces for applications ranging from 0-5 KG to 0-500 KG.



The MQ4 Series is a high performance weigh module constructed of stainless steel. The MQ4 utilizes the VE4-C Series dual-guided cantilever beam load cell that readily tolerates angular, eccentric, and side loading effects, with minimal sensitivity to these anomalies. The MQ4 Series is designed to accurately measure compression forces for applications ranging from 0-5 KG to 0-500 KG. The MQ4 Series includes factory adjusted integral overload protection for both compression and tension (uplift), yielding a safe overload rating of up to 500% of rated capacity. The included Viton LRP (Load Receiver Pad) promotes equal load distribution between adjacent weigh modules and reduces the effects of shock loading and vibration. The MQ4 Series load receiver plate articulates 3° in all directions; accommodating vessel support alignment, sloped flooring, thermal expansion and other installation variables. This easy-to-install weigh module mounts directly to the floor or structural supports, and is completely self-checking, including uplift constraint with accurate (tension) measurement. The MQ4 Series weigh module is Harsh Environment Sealed to IP68, incorporating a welded bellows seal to protect all internal components. The premium instrumentation grade cable features a durable PVC jacket over a tinned-copper braided shield for superior protection, minimizing unwanted electrical effects of RFI and EMI. The attributes of the MQ4 Series make it an ideal choice for measurement in C-I-P (Clean in Place) process, Pharmaceutical, Industrial, precious material handling, and weighing situations where a versatile high performance, low capacity weigh module solution is required.



This Weigh Module uses the model VE4-C FM Approved load cell

APPLICATIONS

- Compression Measurements
- Tank, Bin and Hopper Weighing
- Mixer and Blender Weighing
- In-Motion/Conveyor Weighing
- OEM and VAR Solutions

FEATURES

- 5 KG to 500 KG Capacities
- 0.02% Accuracy Class
- 2 mV/V Full Scale Output
- 10 FT PVC Cable
- FM Approved, Intrinsically Safe
- Compact Size
- IP68 Environmental Sealing
- Stainless Steel Construction
- Dual Guided Beam Design
- Articulating Load Receiver Plate

For more information call **1-888-545-8988**

SENTRAN, LLC 4355 LOWELL STREET, ONTARIO, CA 91761, U.S.A.

888-545-8988 T: 909-605-1544 FAX: 909-605-6305 www.sentranllc.com

MQ4 Series Specifications

Innovative Measurement Solutions



PERFORMANCE

Rated Capacities (KG)	5, 10, 20, 30, 50, 100, 200, 350, 500
Rated Output (FSO)	2 mV/V
Output Tolerance	±0.25 % R.O.
Combined Error Band	≤ 0.03 % FSO
Non-Linearity	≤ 0.02 % FSO
Hysteresis	≤ 0.02 % FSO
Non-Repeatability	≤ 0.02 % FSO
Zero Balance	<2.5 % FSO *Load Cell Specification. Top Plate Weight Adds <8%
Creep (30 Minutes)	≤ 0.03 % of Load

MECHANICAL

Load Cell Material	17-4 Stainless Steel
Load Cell Finish	Natural Bright
Mount Material	Stainless Steel
Mount Finish	Stainless Steel
Safe Overload	5 to 50KG: 500% RC 100 to 500KG: 300% RC
Ultimate Overload	Tension/Compression 5 to 50KG: 1000% RC 100 to 500KG: 600% RC Side: 20% RC
Deflection	See Dimensions Table

ELECTRICAL

Input Impedance	400 ± 20 ohms
Output Impedance	350 ± 3 ohms
Insulation Resistance	>2000 Megohms @ 50 VDC
Excitation Voltage	10 V AC/DC (15 V maximum)
Cable Color Code	+ Excitation (red) - Excitation (black) + Signal (green) - Signal (white) Shield (natural)
Cable Type	4-conductor, 24 AWG, PVC, Tinned Copper Braid, Diameter: 0.200"
Cable Length	See Dimensions Table
Cable Termination	Finished Conductors
Cable Seal	Epoxy Gland Seal

ENVIRONMENTAL

Temperature, Operating	-20 to +160 °F (-30 to +70°C)
Temperature, Compensated	14 to +122 °F (-10 to +50°C)
Temperature, Storage	-58 to +185 °F (-50 to +85°C)
Temperature Effects	Zero < 0.0015% FSO/°F < 0.0026% FSO/°C
Temperature Effects	Output < 0.0008% of Rdg./°F < 0.0014% Rdg./°C
Sealing	IP68; Continual Immersion Tolerance
FM Approval	Per Sentran: FM Certificate of Conformity: FM24US00012X and FM24CA0005X

FM approved versions carry a "-FM" suffix to the part number. Every Sentran unit of an FM APPROVED product will bear an FM compliant label indicating the application level (e.g., Class 1, Division 1, Groups) corresponding to the type of protection required.

MQ4 Series Typical System Configuration

SENSING LOAD CELL(S)




SIGNAL CONDITIONING

Amplifier/Transmitter JF Series	
Amplifier/ Transmitter JA Series	
Digital Indicator 250 Series	
Digital Indicator 250SS Series	
Digital Indicator/Controller KD3 Series	
Digital Indicator/Controller KD4 Series	


OUTPUT OPTIONS

0-5 VDC
0-10VDC
±5 VDC
±10 VDC
4-20 mA
0-20 mA
RS-232
RS-422
RS-485
20 mA Serial Loop
Ethernet
Profibus DP
DeviceNet
CANOpen
ControlNet
Modbus RTU
Wireless

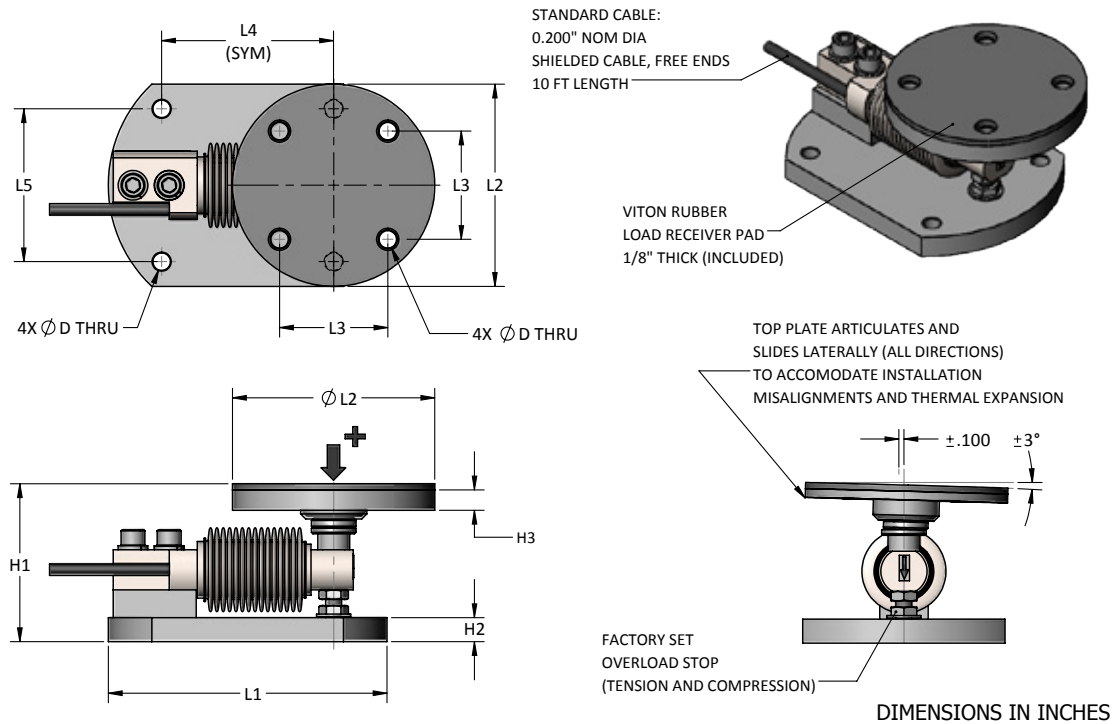


Capacity (LB)	D	H1 (nom)	H2	H3	L1	L2	L3	L4	L5	Recommended Bolt Torque	Deflect	Weight
5, 10, 20	0.34	3.10	0.47	0.17	5.47	3.97	2.13	3.38	3.00	17 FT-LB	0.02	6.0 LB
30, 50, 100, 200, 350, 500	0.34	3.10	0.47	0.37	5.47	3.97	2.13	3.38	3.00	17 FT-LB	0.02	6.0 LB

MQ4 Wiring Diagram

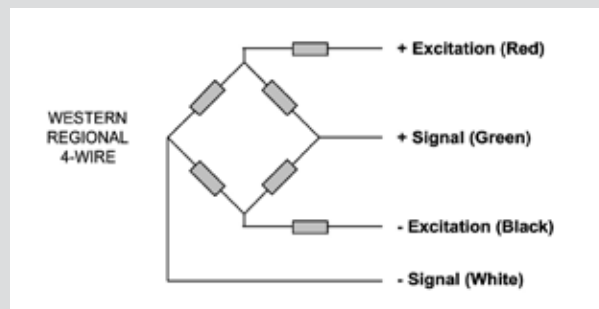



Compression Weigh Module

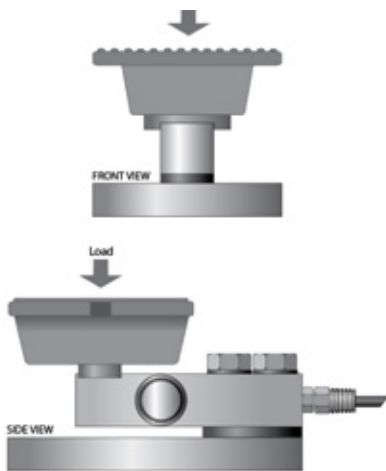

In-Line Check Weighing



Free Standing Tank Weighing



Legal Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Sentran, LLC, Incorporated, its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Sentran, LLC"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify Sentran, LLC's terms and conditions of purchase, including but not limited to, the warranty expressed therein. Sentran, LLC makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. To the maximum extent permitted by applicable law, Sentran, LLC, disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability. Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Sentran, LLC's knowledge of typical requirements that are often placed on Sentran, LLC products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Sentran, LLC. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Sentran, LLC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Sentran, LLC for any damages arising or resulting from such use or sale. Please contact authorized Sentran, LLC personnel to obtain written terms and conditions regarding products designed for such applications.



SENTRAN, LLC

4355 LOWELL STREET
ONTARIO, CA 91761-2225, U.S.A.
T: 909-605-1544 F: 909-605-6305

www.sentranllc.com

Innovative Measurement Solutions
