



SENTRAN

Welded Sealed S Beam Load Cell

ZD4-C Series

The ZD4-C Series is designed for heavy washdown and corrosive environment applications. Constructed of welded sealed stainless steel, it measures tension and compression loads in capacity ranges of 0-500 lbs. to 0-20,000 lbs.

The ZD4-C Series is a high performance S-Beam load cell constructed of heat treated stainless steel. The ZD4-C is designed to accurately measure tension and compression forces for applications ranging from 0-500 LB to 0-20,000 LB. The ZD4-C features a robust shear beam design (>500 LB) that readily tolerates moments induced by angular, eccentric, or off-center loading, with minimal sensitivity to these extraneous loads. The ZD4-C Series load cell is Harsh Environment Sealed to IP68 incorporating a welded cover seals to protect all internal components. The load cell output signals are calibrated to a close tolerance to facilitate multiple load cell summing applications. The integral premium instrumentation grade cable features a durable PVC jacket over a tinned-copper braided shield for superior mechanical protection and for minimizing the unwanted electrical effects of RFI and EMI. The versatile S-Beam configuration is convenient for many applications such as weighing tanks, bins, hoppers, conveyors, and similar applications. The ZD4-C is an ideal choice for measurement in C-I-P process, heavy washdown and corrosive applications, reactor, mixer and blender weighing where a precision high performance load cell solution is required.



APPLICATIONS

- Tension/Compression Force Measurements
- Level and Inventory Monitoring
- Clean-In-Place
- Heavy Washdown
- Corrosive Environments
- Tank, Bin and Hopper Weighing
- Process Control Weighing

FEATURES

- 500 LB to 20K LB Capacities
- 0.02% Accuracy Class
- 3 mV/V Full Scale Output
- 20 FT PVC Cable
- FM Approved, Intrinsically Safe
- IP68 Environmental Sealing
- Stainless Steel Construction
- S-Beam Configuration with Shear Design
- Universal - Tension and Compression

For more information call **1-888-545-8988**

SENTRAN, LLC 4355 LOWELL STREET, ONTARIO, CA 91761, U.S.A.

888-545-8988 T: 909-605-1544 FAX: 909-605-6305 www.sentranllc.com



ZD4-C Series Specifications

Innovative Measurement Solutions 

PERFORMANCE

Rated Capacities ⁽¹⁾ (LB)	500, 1K, 1.5K, 2K, 2.5K, 3K, 5K, 10K, 15K, 20K
Rated Output (FSO)	2 mV/V
Output Tolerance	$\pm 1\%$ R.O.
Combined Error Band	$\leq 0.02\%$ FSO
Non-Linearity	$\leq 0.02\%$ FSO
Hysteresis	$\leq 0.03\%$ FSO
Non-Repeatability	$\leq 0.03\%$ FSO
Zero Balance	$\leq 1.0\%$ FSO
Creep (30 Minutes)	$\leq 0.03\%$ of Load

⁽¹⁾ ("K"=Thousand)

MECHANICAL

Load Cell Material	Stainless Steel
Clean-In-Place Finish	Natural Bright
Safe Overload	Compression 150% FSO Tension 150% FSO Side Load 30% FSO
Ultimate Overload	Compression: 300% FSO Tension: 300% FSO Side Load 50% FSO
Deflection	See Dimensions
Weight	See Dimensions

ELECTRICAL


Input Impedance	400 ± 20 ohms
Output Impedance	350 ± 3 ohms
Insulation Resistance	>2000 Megohms @ 50VDC
Excitation Voltage	10 V AC/DC (15 V maximum)
Cable Color Code	+ Excitation (red) - Excitation (black) + Output (green) - Output (white) Shield (natural)
Cable Type	4-conductor, 24 AWG, PVC Jacket, Tinned Copper Braid, Diameter: 0.200"
Cable Length	See Dimensions Table
Cable Termination	Finished Conductors
Cable Seal	Compression Gland Fitting


ENVIRONMENTAL

Temperature, Operating	-20 to +160 °F (-29 to +71°C)
Temperature, Compensated	14 to +122 °F (-10 to +50°C)
Temperature, Storage	-58 to +185 °F (-50 to +85°C)
Temperature Effects	Zero $< 0.0015\%$ FSO/°F $< 0.0026\%$ FSO/°C
Temperature Effects	Output $< 0.0008\%$ of Rdg./°F $< 0.0014\%$ Rdg./°C
FM Approval	Per Sentran: FM Certificate of Conformity: FM24US00012X and FM24CA0005X

FM approved versions carry a "-FM" suffix to the part number. Every Sentran unit of an FM APPROVED product will bear an FM compliant label indicating the application level (e.g., Class 1, Division 1, Groups) corresponding to the type of protection required.


ZD4-C Typical System Configuration

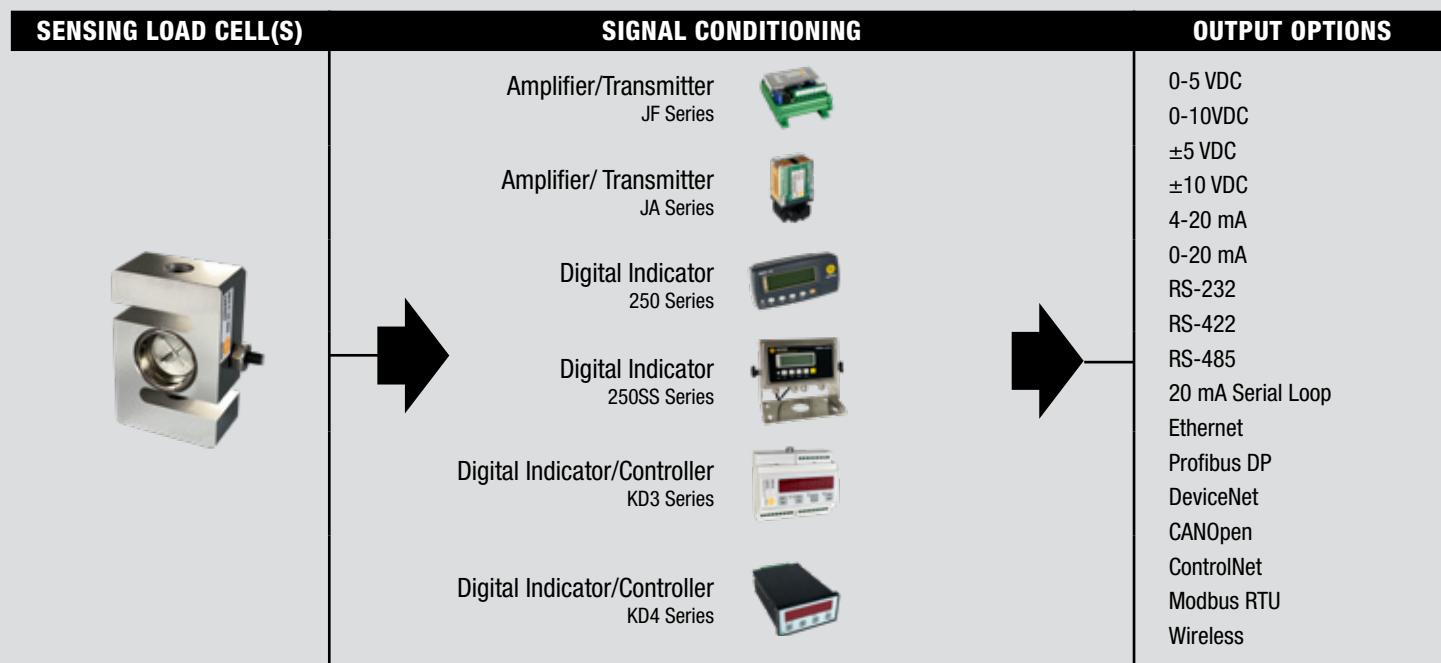

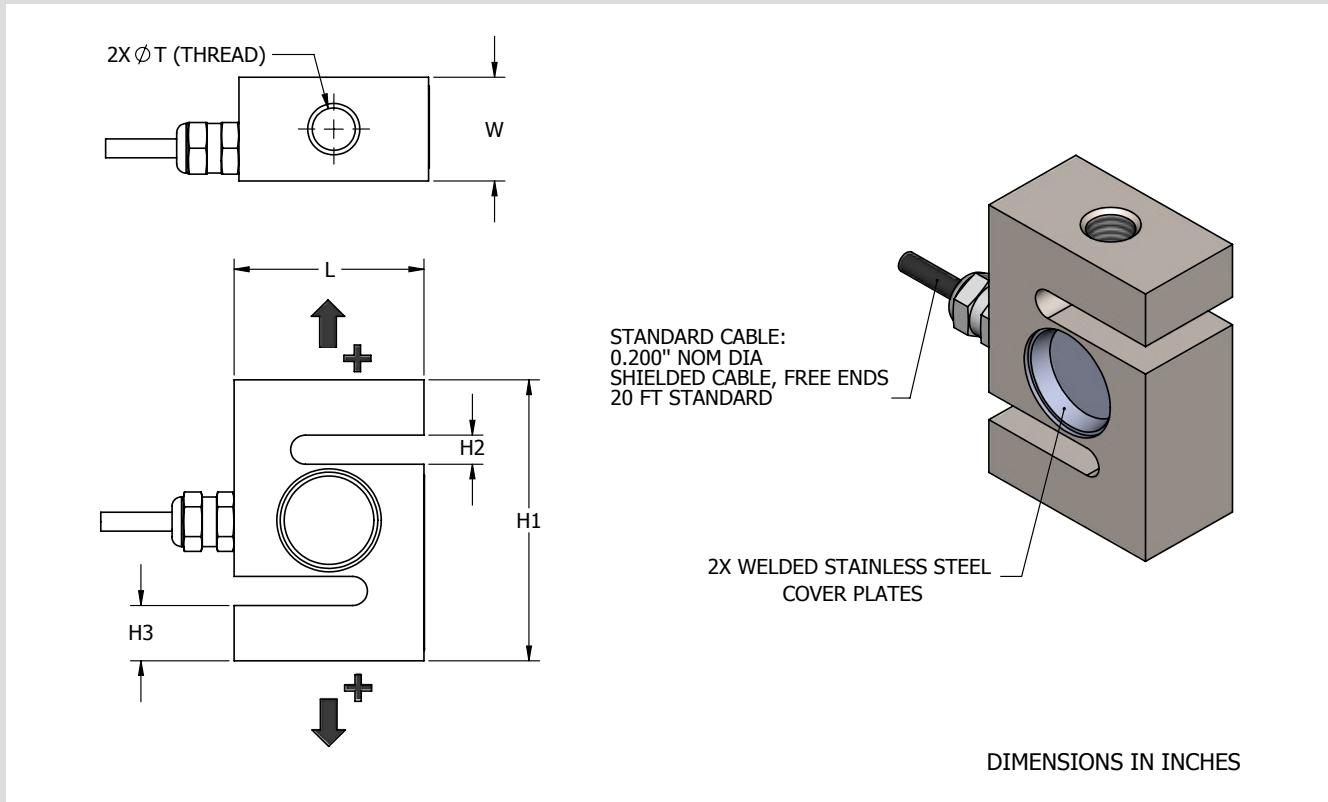


CAPACITY (LB)	H1	H2	H3	L	W	T(THREAD)	DEFLECT	WEIGHT
500, 1K, 1.5K, 2K, 2.5K, 3K	3.00	0.31	0.61	2.00	1.11	1/2-20 UNF-2B	0.012"	2.0 LB
5K	4.00	0.47	0.84	3.00	1.11	3/4-16 UNF-2B	0.013"	3.5 LB
10K	4.00	0.47	0.76	3.00	1.25	3/4-16 UNF-2B	0.019"	4.0 LB
15K	5.50	0.71	1.27	4.00	1.25	1-14 UNF-2B	0.019"	6.5 LB
20K	7.00	1.18	1.32	5.00	2.00	1 1/4-12 UNF-2B	0.018"	15.5 LB


ZD4-C Wiring Diagram

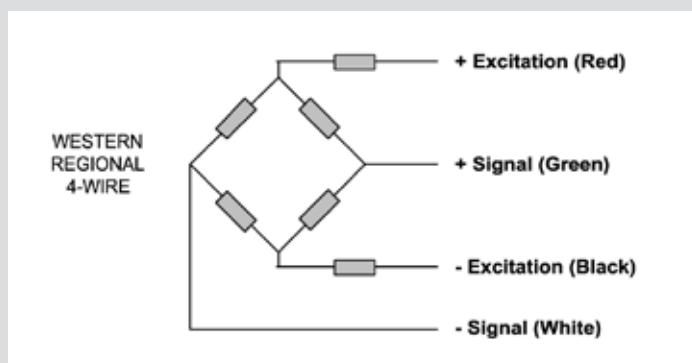


Compression Installation Components

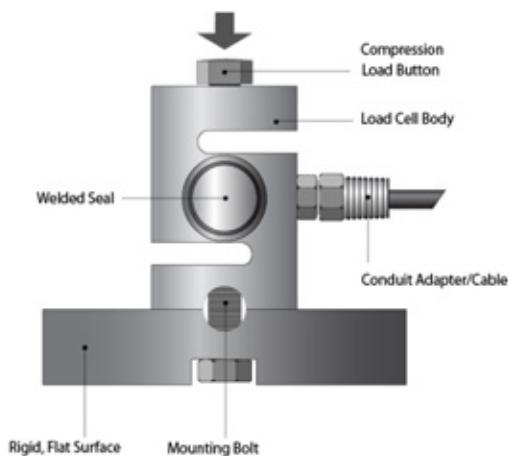


Universal Measurements Components

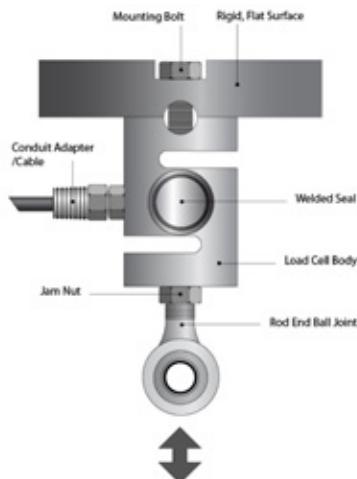


Universal Measurement Components

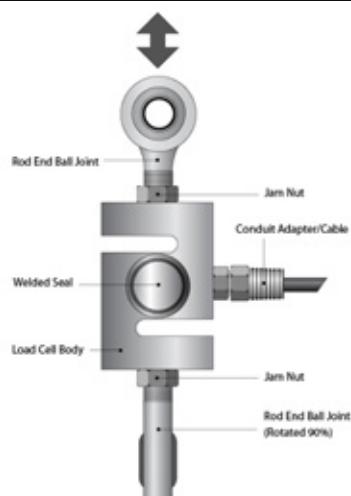

Stainless Tension Module Components

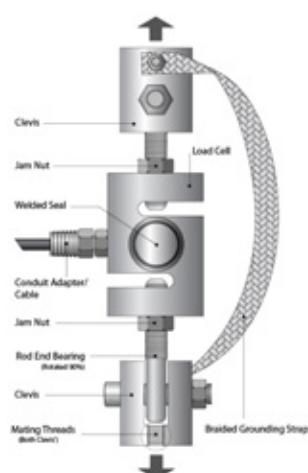

Dynamometer

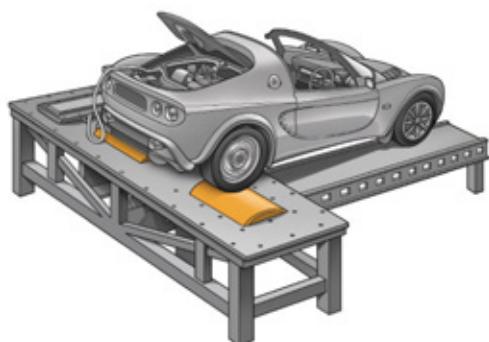

Corrosive/Washdown



- MA Series Tension Cell Mount
- Companion Loading Hardware
 - Eyebolts
 - Rod End Bearings
 - Load Buttons
 - Eye Nuts
 - Connecting Links
- In-Line Analog or Serial Transmitters
- Display/Control Instrumentation
- Junction/Summing Boxes
- Wireless Operation
- MS Connectors
- Shunt Calibration
- Use and Installation Guide
- Custom and OEM Solutions

Application Recommendations / Suggestions

- The Z Series Load Cells are universal by design, meaning they are compatible with tension, compression and tension/compression force measurement applications. The most common loading methods are via a load button, rod end bearings, or by utilizing the MA Series Weigh Module assembly. Sentran offers a variety of additional optional loading hardware such as eyebolts, connecting links and similar components that contribute to ease of installation, ease of use and optimum performance.
- The Z Series Load Cell is an ideal solution for single and multiple weighing or force measurement applications ranging from Universal Force/Material Testing Machines to suspended weighing applications typical of many in-process and storage tanks, bins and hoppers.
- In multiple load cell applications involving four or more supports, use care to ensure that the load on each load cell support varies by no more than 20% over the complete loading range. Balancing of the load can be accomplished by using shims, turnbuckles or similar mechanical components to achieve satisfactory load distribution.
- When using eyebolts, rod end bearings or the MA Series mounting assembly on both ends of the load cell, orient these components perpendicular relative to one another, as shown in the Installation Examples illustrations in this document.
- The load cell cable must be arranged such that it does not influence measurements by virtue of the stiffness of the cable. Looping a section of the cable or using some other means to provide slack in the cable will usually accomplish this. Lower capacity load cells are particularly sensitive to this issue. After installation is complete, gently move the cable back and forth. If the output of the load cell does not change, there is no cable influence.
- Z Series S Beams output signals are calibrated to a close output tolerance to facilitate in situ interchangeability and multiple load cell summing applications. However, the use of a Sentran load cell signal trimming summing junction box is recommended for achieving optimum performance and minimum sensitivity to changes in load distribution in multiple load cell applications.
- Z Series S Beam Load Cells are available in many capacity ranges. These load cells are designed to be used over the complete range of "no load" (0) up to the rated capacity. For example, 1,000 lbs. rated capacity Z Series S Beams are designed to be used for measurements within the range of 0 to 1,000 lbs. These load cells can be safely loaded to 150% of rated capacity without affecting the load cell performance within the capacity range.
- The reason for the variety of capacities is to allow the user to select the most ideal capacity for a given application. The most ideal capacity is one in which at least 80% of the capacity range is utilized at some point in the measurement process, without exceeding the rated capacity. This allows the load cell to deliver the highest signal to load ratio, and therefore the highest resolution and most stable measurement. There are other factors to consider, such as excitation voltage, but correct "sizing" of the load cell is the first step. Both the dead load and the live load need to be considered in determining the gross load and the load cell capacity.
- Contact Sentran's expert Applications Specialists for additional professional guidance.

Commercial Information & Precautions

- Do not exceed specified Maximum Load Limits.
- The Safe Load Limit is the point to which normal loading will not cause the load cell to experience an excessive zero shift or a degradation in performance.
- Use reasonable care when applying load to any load cell. Load limits can be exceeded due to shock loading (i.e. dropping a load onto a load cell), off axis loading, side loading and similar loading conditions that are beyond design capabilities.
- The structural integrity of all load bearing components in any load cell system should be designed with safety redundant load paths. (Overload stops, overhead load arrestors, etc.)
- The surfaces to which the load cell(s) is attached and/or is reacting against must be of sufficient structural integrity to carry loads up to and exceeding the ultimate ratings of the load cell(s) being used, while also taking into account any companion hardware being used in conjunction with the load cell.
- To ensure optimum performance, all measuring system cabling should be run through dedicated conduit when available. Avoid proximity to electrical noise sources and use of "dirty" power sources.
- The load cell cable shield should be connected to a dedicated instrument ground point only.
- Force measurement and weighing applications have numerous application-specific considerations to be addressed both mechanically and electrically. Therefore, installation of all system components are the responsibility of the user and should always be approved by a qualified, professional engineer. Any information provided by Sentran, LLC is intended only as informational and does not constitute a formal recommendation for the use of any product for any application.
- Sentran offers application/installation/use guides on request for most standard products. Please contact your Sentran representative for assistance, or visit our technical library resource at www.sentranllc.com.

Legal Disclaimer



ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Sentran, LLC, Incorporated, its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Sentran, LLC"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. The product specifications do not expand or otherwise modify Sentran, LLC's terms and conditions of purchase, including but not limited to, the warranty expressed therein. Sentran, LLC makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. To the maximum extent permitted by applicable law, Sentran, LLC, disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability. Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Sentran, LLC's knowledge of typical requirements that are often placed on Sentran, LLC products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Sentran, LLC. The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Sentran, LLC products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Sentran, LLC for any damages arising or resulting from such use or sale. Please contact authorized Sentran, LLC personnel to obtain written terms and conditions regarding products designed for such applications.

SENTRAN, LLC

4355 LOWELL STREET
ONTARIO, CA 91761-2225, U.S.A.
T: 909-605-1544 F: 909-605-6305

www.sentranllc.com

Innovative Measurement Solutions